

## Class 5, Telemetry Surface Torque Verification Tool Kit







Euroload Limited provide a range of telemetry torque Verification tools kits.

Class 5 telemetry verification kit is made of high-grade stainless steel (load cell) with ELT24 telemetry output, and the bucket is made of anodised aluminium.

As standard the kit comes with telemetry handheld receiver. Receiver options include, laptop c/w USB receiver and free data logging software. RS232 output modules, Analogue output module, gateways and many more.

With 500 metre transmit range, you can stand clear of the test. You can have more than one handset reading the load and a laptop datalogging at the same time.

0.1% high accuracy national standard test rig to 65,600 NM at Aberdeen factory.

Designed to verify ROV torque tool is working accurately prior and after launch.

Euroload Limited manufacture Surface torque verification

kits to: BS EN ISO 13628-8

Class 1-4 11/16", 1-1/8", 1-1/2" API 17H- Hi-torque sockets 35mm

Class 5 sockets 2"


Class 6 sockets 2-5/8"

Class 7 sockets 3-1/2"

## **Features:**

- . Supplied in maxi case
- . ELT24 telemetry output
- . Multiple receiver options
- . Multiple readout options
- . IP66 ingress protection as standard
- . High accuracy and repeatability
- . Selectable units of measurement
- . 2-year manufacturer warranty
- . No cables required
- . Massive stock held in factory
- . Worldwide agent network with stock held



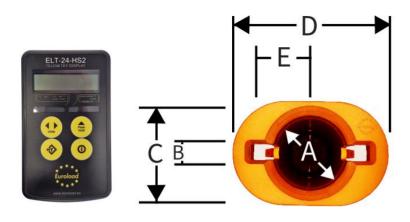



		CLAS	S 5 Telemet	ry Surface	Verifi	cation	Unit				
ELT-7K-K2		Α	В	С	D		E	F			
		190	38	240		350	152.5	429			
Conforms to BS EN ISO 13628-8:2006											
		7	7,000 NM T	orque Verif	icatio	n Uni	t				
Max Load				7,000 NM							
	Safe O	verload		150%							
	Ultimate	Overload		500%							
	Material/	Load Cell		17-4 stainless steel							
	Bucket I	Material		Aluminium 6082-T6 anodised							
	Output Standard				ELT24 telememtry 2.4 Ghz						
Receiver standard				ELT24-HS2 handheld readout							
Accuracy				1% of applied torque to BS 7882:2017							
Enviromental Rating				IP67							
Standard Interface			2" 50.8MM								
Weight				30KG							
Certificat	tion packag	ge supplied	with each li	nk contains: Calibration Certificate to BS 8422:2003,							
Declar	ration of In	corporatio	n, EU Decla	ration of C	onfor	mity, l	Declaration	n of Manufa	acture		
Decl	Declaration of Incorporation,CE- Aproval Statements, Checklist and user instructions.							ons.			
			Material Ce	ertificates on Request.							



## CLASS 5 Telemetry Torque load cell

Euroload Limited, Unit 9, Airside Business Park, Dyce Drive, Kirkhill Ind Est, Dyce, Aberdeen, AB21 OGT. Tel: +44 (0) 1224 774115 e-mail info@euroload.eu www.euroload.eu

Local Agent
-------------