




17H Hi Torque Surface Torque Verification Transducer

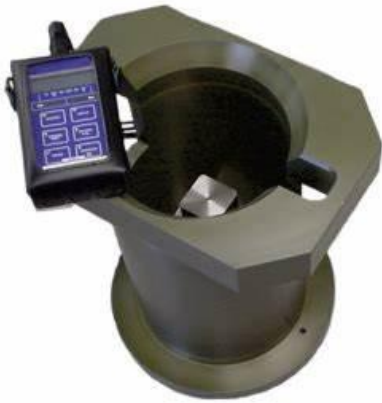

Euroload Limited provide a range of torque load cells. The 3000 NM torque load cell is a stock item. The 17H (35mm) Hi-torque analyser is manufactured from high grade stainless steel with mil-spec connections for use in ROV buckets.

We can supply the cable any length with various readout options available. As standard we would offer the PSD232 handheld display c/w RS232 output.



0.1% high accuracy national standard test rig to 65,600 Nm at Aberdeen factory.

Designed to fit in Surface Torque Verification Unit to verify ROV torque tool is working accurately.



Euroload Limited manufacture Surface torque verification transducers units to:

Class 1 and 2 sockets 11/16"

Class 3 socket 1-1/8"

Class 4 socket 1-1/2" Male and Female

Class 5 socket 2"


Class 6-7 socket 3.5"

API 17H- Hi-torque sockets 35mm



Features:

- . Fully stainless steel construction
- . Mil-spec connectors
- . Multiple output options
- . Multiple readout options
- . IP67 ingress protection as standard
- . High accuracy and repeatability
- . Selectable units of measurement Nm or Ft/lb
- . Peak hold as standard
- . 2 year manufacturer warranty
- . Any cable length on order
- . Massive stock held in factory
- . Worldwide agent network with stock held

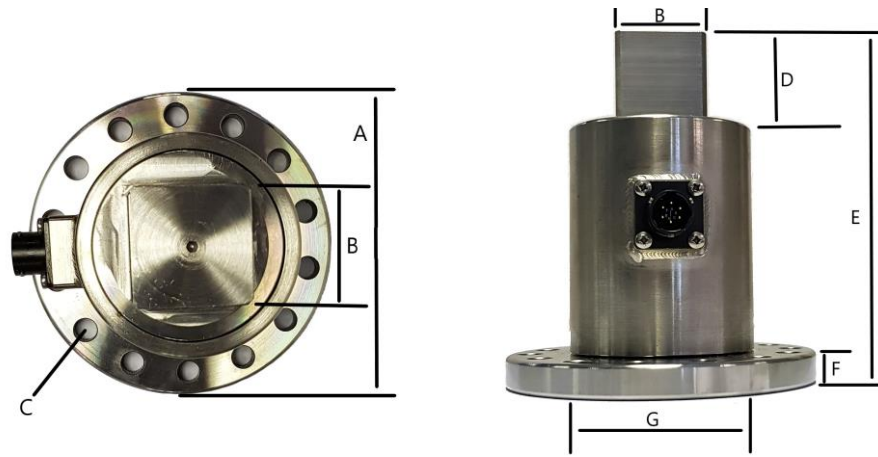

3,000Nm 17H-Hi-Torque surface verification transducer							
EL-T-3K-M-17H	A	B		D	E	F	G
	120	35		35	135	12	72
C	14 holes dia 9.0 equal spaced on 102.0 PCD						
3,000 NM Torque Load Cell Specifications							
Max Load				3,000 NM			
Safe Overload				150%			
Ultimate Overload				500%			
Material				17-4 stainless steel			
Output Standard				1.5 Mv/v			
Bridge Resistance				700 ohm			
Accuracy				Class 1 transducer to BS 7882:2017			
Environmental Rating				IP67			
Insulation Value				Greater than 5 G ohm			
Standard cable length				5 Mtr			
Certification package supplied with each link contains: Calibration Certificate to BS 8422:2003, Declaration of Incorporation, EU Declaration of Conformity, Declaration of Manufacture Declaration of Incorporation, CE- Approval Statements, Checklist and user instructions.							
Material Certificates on Request.							



API 17H-Hi-Torque 3,000 NM Torque load cell

Euroload Limited, Unit 9, Airside Business Park,
Dyce Drive, Kirkhill Ind Est, Dyce, Aberdeen,
AB21 0GT. Tel: +44 (0) 1224 774115 e-mail
info@euroload.eu www.euroload.eu

Local Agent: