



Tensile Telemetry Load Links ELT-24

Euroload Limited provide a range of Aluminium tensile telemetry load links. Designed from aerospace grade aluminium for maximum confidence. Excellent overload properties, ergonomic design to minimise injury if dropped, 14 meter water depth test as standard, unique screw off battery compartment.

This unit has been designed to cope with any environment with ease.

The options available for the ELT telemetry output are Unsurpassed, from battery operated handsets to receiver modules for analogue output, digital output, gateways, datalogging, large digit displays, printers, etc.

See our ELT24 Made to Measure brochure for a full list.

The 2.4 GHz signal is worldwide exempt.

Carry cases are purpose built and laser cut to protect the load links during storage and shipping.


The standard range cover 6.5 tonne to 500 tonne. Special's are available on request. These load links are utilised in varies industries including, Oil and Gas, Manufacturing, Aerospace, Renewables, Fishing, Transportation, Marine.

Anywhere a reliable tensile load reading is required.

Features:

- . ELT24 telemetry output. 2.4 GHz worldwide except
- . Unsurpassed range of receivers and modules
- . Free datalogging software
- . Aerospace grade aluminium
- . IP68 ingress protection as standard
- . Unique screw off battery compartment
- . Selectable units of measurement
- . Peak hold as standard
- . 2 year manufacturer warranty
- . Designed to minimise impact injuries
- . Massive stock held in factory
- . Worldwide agent network with stock held



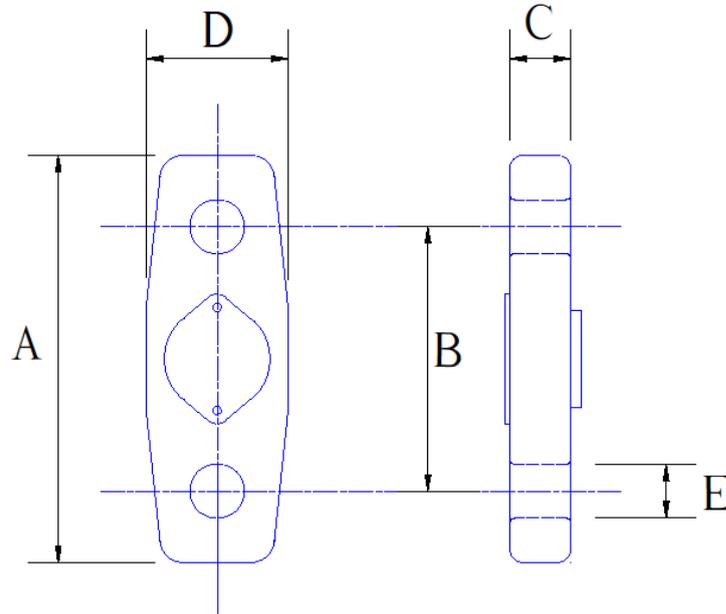

Dimension`s and Specification`s

Capacity		6.5	13.5	25	35	55	85	100	120	150	200	250	300	400	500	
Dim A	mm	304	344	416	440	500	588	640	712	790	805	900	1120	1240	1430	
Dim B	mm	238	250	270	280	280	340	360	400	400	420	452	600	656	740	
Dim C	mm	32	52	62	70	85	115	120	125	130	160	165	180	200	220	
Dim D	mm	117	130	136	145	170	188	188	220	254	265	336	389	460	490	
Dim E	mm	27	40	55	62	75	86	100	100	120	135	145	155	182	190	
Shackle size		6.5	13.5	25	35	55	85	120	120	150	200	250	300	400	500	
Weight KG		3.55	5.15	7.65	9.8	16.9	30	32.5	46	60	115		189	300	382	
Units	1	tonnes														
	2	lbs														
Resolution	1	0.001					0.005					0.01				
	2	2					10					20				
Factor of Safety		Minimum 5:1														
Battery type		Link: 2 off AA (depending on update rate up to 6 months life) Handset 2 off AA (40 hours)														
Accuracy		±/- 1% of applied load														
Operating Temp		-10 deg C to +60 deg C														
Enviromental rating		IP68														
Radio Frequency		2.4Ghz ELT24 transmitter, optional receivers. Transmition range 500 mtr depending on site conditions.														
Material		Aerospace Grade Aluminium: All test certificates for material available including ultrasonic test certificates.														
Weight in Case KG		5.75	8.25	10.75	14.5	22.65	38.8	42	58.5	75	115	150	215	360	442	
Dims of case Length		410	500	500	540	600	660	720	790	870	940	1000	1250	1400	1550	
Case width		330	410	410	430	480	370	370	380	390	400	400	440	460	480	
Case height		140	140	140	210	220	280	300	410	460	500	550	620	680	720	
Note: Any units of measurement can be specified at time of order.																
Certification package supplied with each link contains: Calibration Certificate to BS 8422:2003, Declaration of Incorporation, EU Declaration of Conformity, Declaration of Manufacture, EC Declaration of Incorporation, CE- Aproval Statements, Checklist and user instructions. Material Certificates on Request.																



ELT-24 Tensile Telemetry Load Links

Local Agent:

Euroload Limited, Unit 9, Airside Business Park, Dyce Drive, Kirkhill Ind Est, Dyce, Aberdeen, AB21 0GT.
Tel: +44 (0) 1224 774115 e-mail info@euroload.eu